

## Features

- Frequency Range DC-12GHz
- 44.5dBm Nominal  $P_{3dB}$
- Maximum PAE at 6GHz of 65%
- Drain Bias 28V
- Technology: GaN on SiC
- Lead-free and RoHS compliant
- Chip Dimensions: 0.81 x 1.68 x 0.10mm


## Applications

- Aerospace & Defense
- Broadband Wireless

## Description

The ICPB2005 is a GaN on SiC discrete HEMT, designed to operate either pulsed or CW from DC to 12GHz. The design is optimized for power and efficiency using field plate technology.

## Image

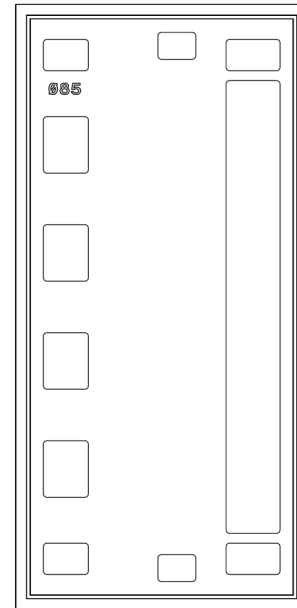

## RF Performance | Simulated Conditions unless otherwise stated | $T_A=25^\circ\text{C}$ , $V_D=28\text{V}$ CW

Parameter	Units	Typical		
Frequency	GHz	3	6	10
Output Power $P_{3dB}$	dBm	44.5	44.5	44.5
Bias Current	mA	100	100	100
PAE @ $P_{3dB}$	%	68	65	57
Gain @ $P_{3dB}$	dB	19	13.5	9.5

## Recommended operating conditions






Parameter	Value
Drain Voltage ( $V_{DG}$ )	12-32 V
Drain Quiescent Current ( $I_D$ )	0.1-0.25A
Drain current RF Drive ( $I_D$ )	2A
Gate Voltage ( $V_G$ )	-2.6V
Power Dissipation (CW)	40W
Channel Temperature (Max)	225°C

## Absolute Maximum Ratings

Parameter	Absolute Maximum
Drain to Gate Voltage ( $V_{DG}$ )	80 V
Gate Voltage Range ( $V_G$ )	-20V to 0V
Gate Current ( $I_G$ )	-5 to 15mA
Power Dissipation (CW)	60W
CW Input Power	+37dBm
Channel Temperature	275°C
Storage Temperature	-65°C to +150°C


Exceeding any one or combination of these limits may cause permanent damage to this device. ICONIC RF does not recommend sustained operation near these survivability limits.

## S-parameters | $T_A = 25^\circ\text{C}$

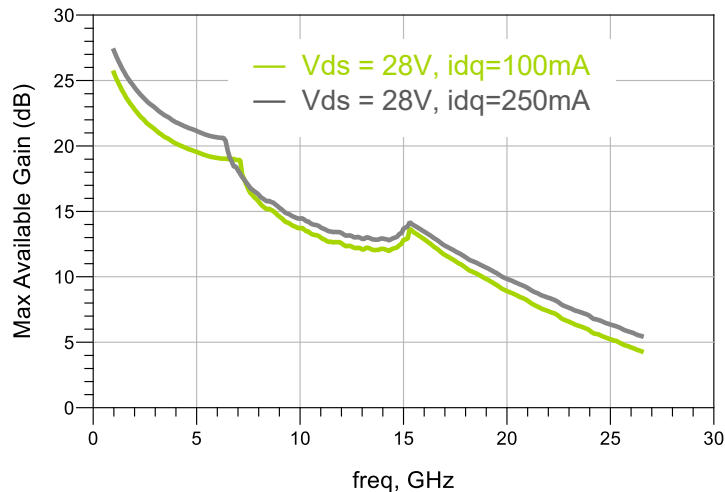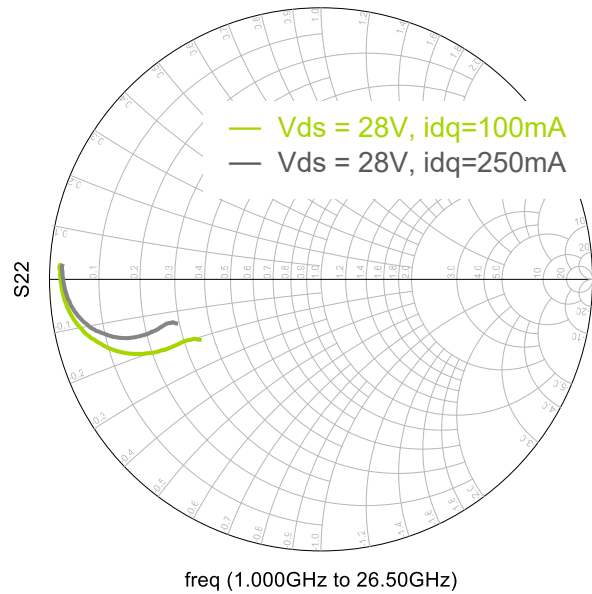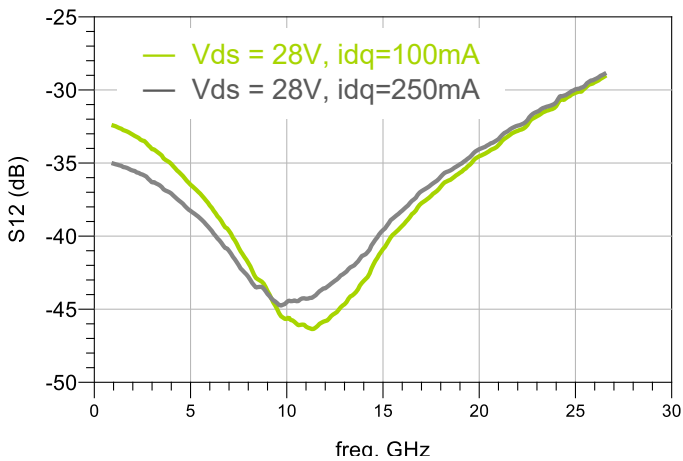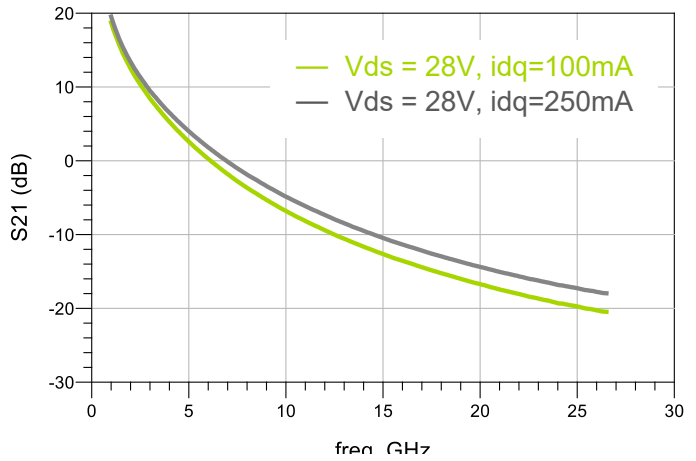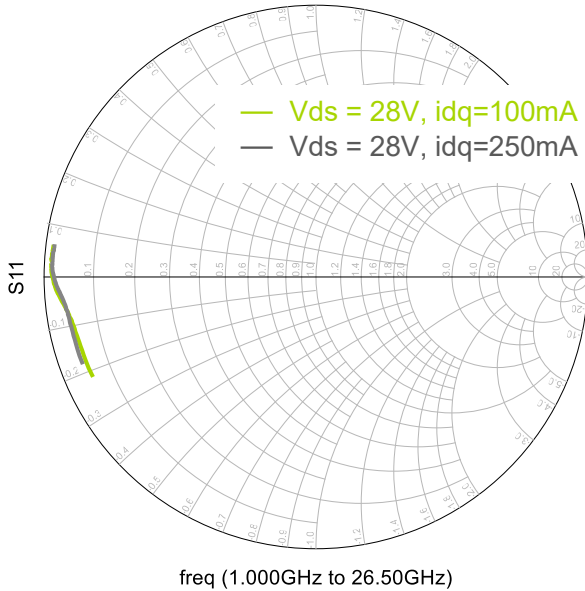

## Load Pull Data 10GHz


P3dB Output Power and PAE contours  
(Vds = 28V, idq=100mA, Z0=10ohms)

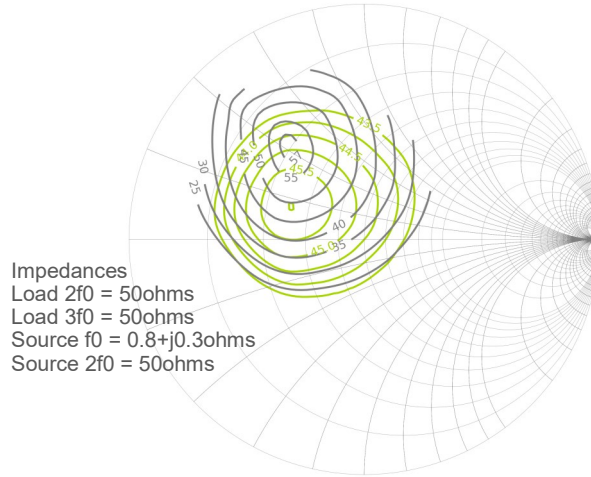


Max PAE = 57%  
at Zload = 4+j4.6 ohms

Max Power = 45.9dBm  
at Zload = 4.4+j0.7 ohms


P3dB PAE contours  
(Vds = 28V, idq=100mA)

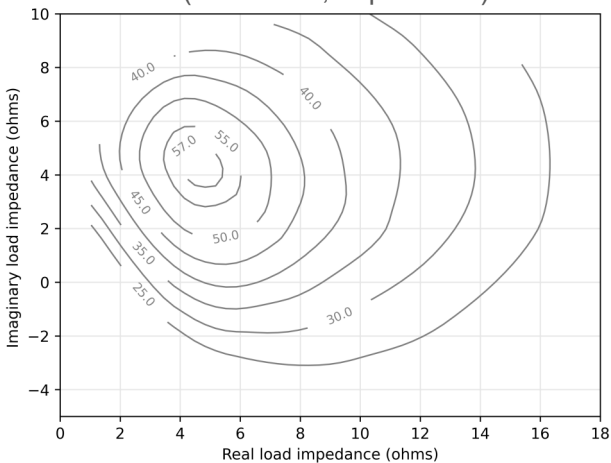


P3dB Output Power contours  
(Vds = 28V, idq=100mA)

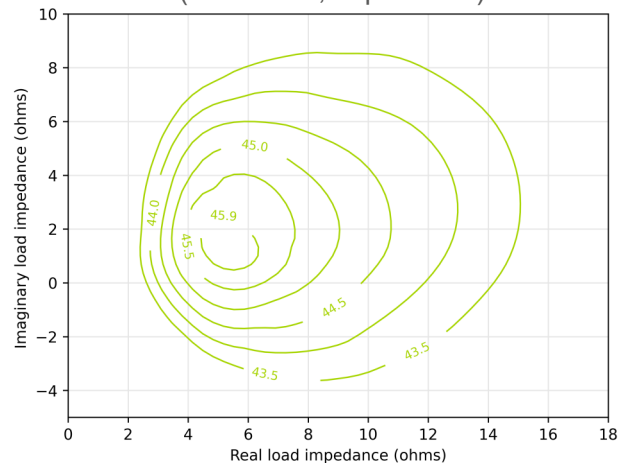


Gain and PAE vs Output Power  
(Vds=28V, idq=100mA, Max PAE tune)

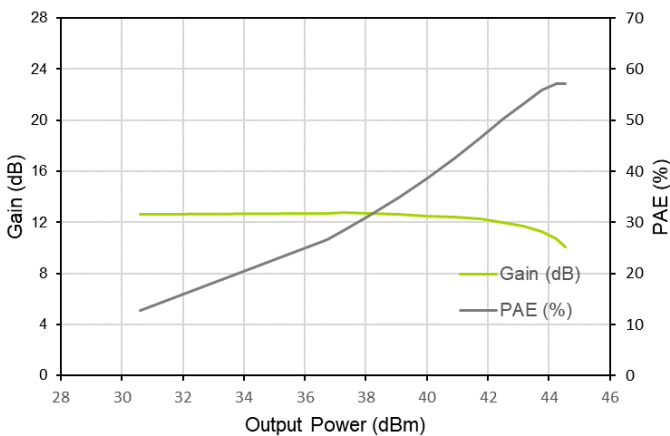

Gain and PAE vs Output Power  
(Vds=28V, idq=100mA, Max Power tune)

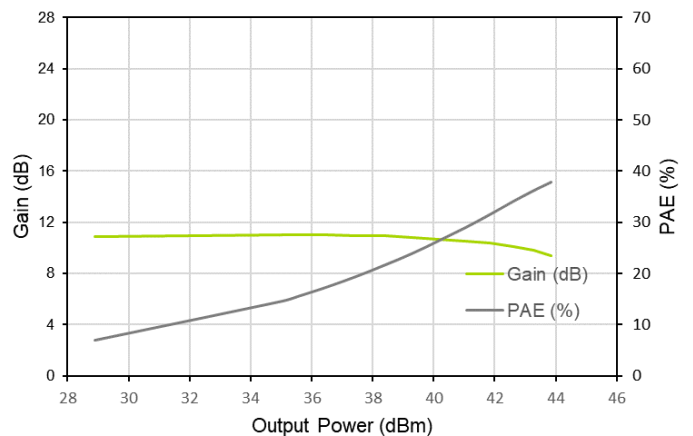

## Mechanical Drawing

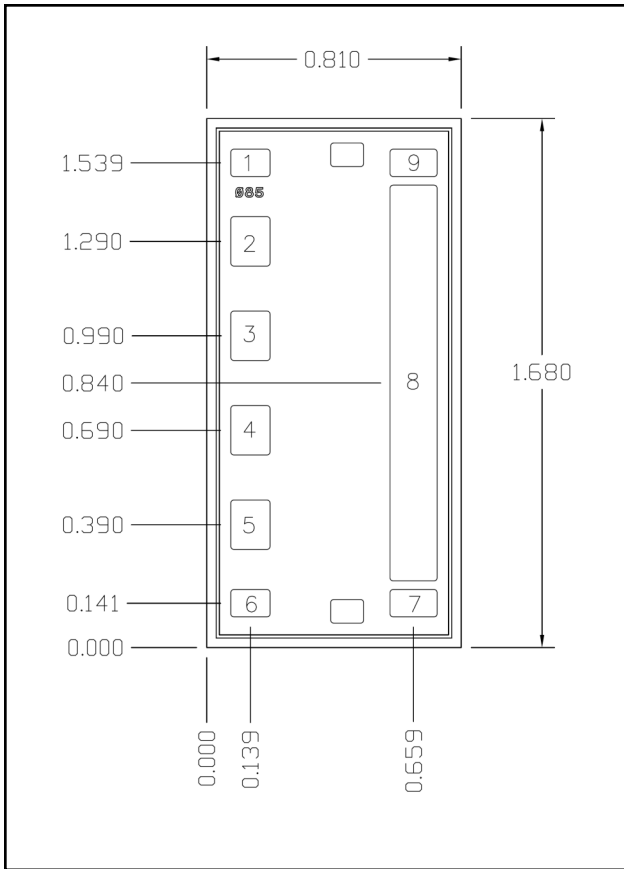

## Bond Pads

Pad Number	Description	Dimensions (mm)
1,6	Gate Resistor	0.087 x 0.125
2,3,4,5	Gate	0.157 x 0.125
7,9	Drain Resistor	0.087 x 0.150
8	Drain	1.257 x 0.150
Die Backside	Source	1.68 x 0.81

## Bias-Up Procedure

1. Set  $V_G = -5V$
2. Set  $V_D$  to 28V
3. Adjust  $V_G$  positive until  $I_D$  quiescent is 0.1A
4. Limit  $I_D$  to 4A
5. Apply RF Signal

## Bias-down Procedure

1. Turn off RF
2. Turn off  $V_D$ , allow drain capacitor to discharge
3. Turn off  $V_G$ .

## Assembly Guidance

Die attach of component using adhesive

- Vacuum collets are preferred method of pickup
- Silver sintered epoxy is recommended

## Interconnect assembly Notes

- Ball Bonding is preferred technique
- Force, time and ultrasonic parameters are critical
- Aluminum wire bonding is not recommended
- Bond Wire diameter of 1.5mil is recommended

## Handling Procedures

Please observe the following precautions to avoid damage:

## Static Sensitivity

Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

©2021 ICONIC RF Ltd All rights reserved.

Trademarks and registered trademarks are the property of their respective owners  
All information herein is subject to change without notice

ICONIC RF Ltd, Innovation Factory, 385 Springfield Road, Belfast, BT12 7DG, United Kingdom

Web: [WWW.ICONICRF.COM](http://WWW.ICONICRF.COM)  
Email: [INFO@ICONICRF.COM](mailto:INFO@ICONICRF.COM)